

STEEL POSTS

De-fence steel posts are manufactured from 75 x 75 x 2.5mm thick RHS tube. They are pre-drilled on all 4 sides to accept our range of steel brackets and finished in high visibility safety yellow powder coat.

Specifications:


Description:	Pre-drilled SHS posts.
Material:	75 x 75 x 2.5mm SHS.
Finish:	Yellow powder coat.
Height:	1300 or 2460mm.
Width:	75 x 75mm.
Foot print:	200 x 84mm.
Weight:	1300mm – 7.4kgs. 2460mm – 12.0kgs.
Installation:	2 off M10 x 75mm concrete screw anchors. (Supplied).

STEEL BRACKETS

A range of four mounting brackets for connecting panels and our steel posts.

Specifications:

Description:	Panel to post connecting brackets. (4 types).
Material:	4mm mild steel.
Finish:	Black powder coat.
Weight:	Approx. 300grams.
Installation:	2 off M8 x 12mm Hex, head bolts with washers (supplied).

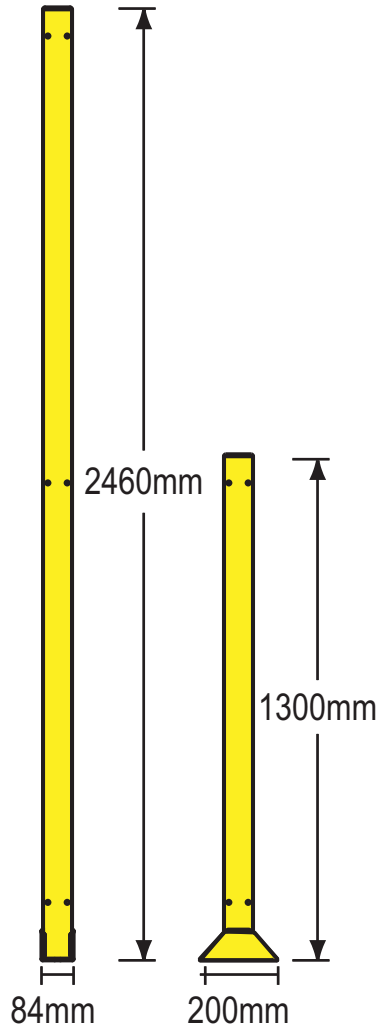

Steel Posts

Pre-drilled SHS posts 75 x 75 x 2.5mm in two standard heights 1300mm and 2460mm.



DF-SPB

Standard Panel bracket kit

This bracket provides universal panel mounting where no side adjustment is required.



DF-APB

Adjustable panel bracket kit

Use in place of DF-SPB where side adjustment is required. Allows for up to 12mm of adjustment.



DF-PCB

Panel connector bracket kit

Used on double De-fence for joining upper and lower panels.



DF-SGB

Self-closing gate bracket kit

Use as either the top or bottom gate hinge. Allows tension adjustment for gate closure. (Use only 1 per gate.)










Steel Post Bases

Post bases are made from heavy 4mm thick mild steel fully welded to the posts. All posts have 25mm cable access at the base. Fixed to the ground using two 12mm in-ground anchors. When the post is removed the floor is left flush with no protrusions.

PART No.	DESCRIPTION
DFP1300	Post 1300 x 75 x 75mm with fixings
DFP2460	Post 2460 x 75 x 75mm with fixings
DF-SPB	Standard panel bracket kit
DF-APB	Adjustable panel bracket kit
DF-PCB	Panel connector bracket kit
DF-SGB	Self-closing gate bracket kit
DF-CP	De-fence panel connector pin

DE-FENCE ESTIMATOR – Using Steel Posts

ITEM	Part No.	Description	Quantity	Comment
	DFP1300 DFP2460	Single height post Double height post	_____ _____	<ul style="list-style-type: none"> All De-fence posts are pre-drilled and tapped to 8mm on all four sides for total flexibility. Supplied with welded bases and masonry fixings.
	DFP2000M DFP1500M DFP1000M DFP750M DFP500M	Mesh panel 2000mm long Mesh panel 1500mm long Mesh panel 1000mm long Mesh panel 750mm long Mesh panel 500mm long	_____ _____ _____ _____ _____	<p>Note: Panel sizes shown actually reflect the distance between post centres. Eg. A 2000mm panel is the distance from post centre to post centre.</p> <p>Standard panels are powder coated black finish with 25 x 25 x 3mm welded mesh infill (aperture size 22 x 22mm). Optional panels with 3mm thick clear polycarbonate in-fill. Polycarbonate is secured in place with continuous custom aluminium extrusion on all four sides.</p>
	DFP2000P DFP1500P DFP1000P DFP750P DFP500P	Polycarbonate panel 2000mm long Polycarbonate panel 1500mm long Polycarbonate panel 1000mm long Polycarbonate panel 750mm long Polycarbonate panel 500mm long	_____ _____ _____ _____ _____	<p>Note: Panel sizes shown actually reflect the distance between post centres. Eg. A 2000mm panel is the distance from post centre to post centre.</p> <p>Standard panels are powder coated black finish with 25 x 25 x 3mm welded mesh infill (aperture size 22 x 22mm). Optional panels with 3mm thick clear polycarbonate in-fill. Polycarbonate is secured in place with continuous custom aluminium extrusion on all four sides.</p>
	DF-SPB DF-APB DF-PCB DF-SGB DF-CP	Standard panel bracket Adjustable panel bracket Panel connector bracket Self closing gate bracket Gate connector pin	_____ _____ _____ _____ _____	<ul style="list-style-type: none"> Provides universal panel mounting where no side adjustment is required. Up to 40mm vertical adjustment. Allows up to 12mm of side adjustment with 40mm vertical adjustment. Can be used in place of DF-SPB. Use on double De-fence for joining upper and lower panels. Use for gates only. Replaces either top or bottom bracket on hinge side of gate. Adjustable for closing tension. Use 1 per gate. Connects top and bottom panel when using a gate.
	DF-GS	Gate stop	_____	<ul style="list-style-type: none"> Non-latching gate stop for use with self closing gates.
	DF-LL DF-LLR	General purpose gate latch Remote gate latch release	_____ _____	<ul style="list-style-type: none"> Lockable and self latching. Optional gate latch release for use with double height gates.
	DF-LB	Lockable drop bolt	_____	<ul style="list-style-type: none"> Key lockable. Use with double gates.

LEGEND



AUSTRALIAN CONTENT

This product has been designed, developed and is either completely or substantially manufactured in Australia. (The minimum Australian content is between 50 and 100%).



NEW AND UNIQUE

This is a new and unique product. It has either been designed, developed and manufactured by the Barrier Group Pty. Ltd. or it is being seen here for the first time.



100% RECYCLABLE

This product is manufactured from virgin grade raw materials and is 100% recyclable using existing, readily available recycling technology and services.



RECYCLED MATERIALS

This product has been manufactured from either a combination of recycled materials and virgin grade materials or entirely from recycled materials.



HOT DIP GALVANISED

This product has been hot dip galvanised prior to any surface coatings being applied. Hot dip galvanised offers vastly improved corrosion protection and extended life in harsh environments.



FIXINGS INCLUDED

This product comes complete with all the necessary fixings to complete the standard installation. When comparing competitors prices against our own, always ensure they have included the fixings with the product (excludes gravel spikes).



5 YEAR WARRANTY

This product carries a 5 year limited warranty against structural failure due to faulty materials or workmanship in our manufactured products, OR structural failure and major fading due to U.V. degradation in our injection moulded products.

(For full conditions visit www.barriergroup.com.au).

WARNING

© Barrier Group Pty. Ltd. takes the protection of its intellectual property (IP) seriously and will not hesitate to pursue legal action against any individual, group or organization attempting to steal, copy or duplicate any of its proprietary designs OR anyone who imports, sells or distributes illegal copies or duplicates of its proprietary designs.

IT'S AGAINST THE LAW – AVOID THE PAIN!