


RETRACTABLE BOLLARDS


Locking Procedure:

1. Insert the 'fingers only' of the key into the bollard, as shown.
Note: Slot in bollard is off-centre. Insert key so that handle is facing out on 'short' side of the cap.
(DIAGRAM 1).
2. Fully insert key while pivoting upwards into the vertical position.
Note: It is important that the key is fully inserted until it can not go any further. (DIAGRAM 2).
3. Lift the key until the weight of the bollard is taken. Rotate anti-clockwise to unlock.
(DIAGRAM 3).
4. Lift bollard until fully extended.
(DIAGRAM 4).
5. While holding bollard in the fully extended position, rotate in anti-clockwise direction until it stops. Remove the key. The bollard should now be locked in the upright position. (DIAGRAM 5).
6. Now re-insert the 'fingers only' of the key and support the bollards weight, then twist from left to right. If locked **correctly** there will be minimal rotation. If **not** locked, the bollard will fully rotate and retract.
(DIAGRAM 6).


Note: Reverse procedure to unlock and lower bollard.

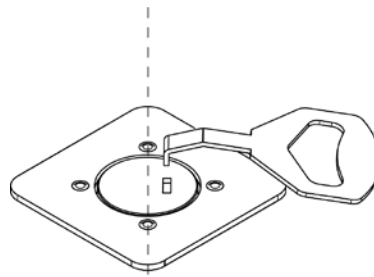


1. Insert key to short side.

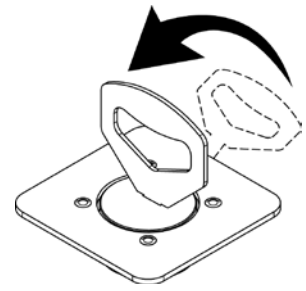


2. Fully insert and pivot key to upright position.

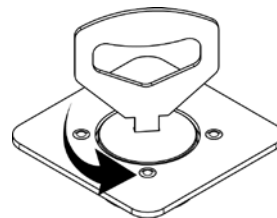


3. Rotate to unlock then lift.

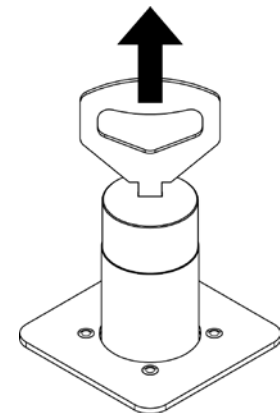

4. Lift until fully extended.

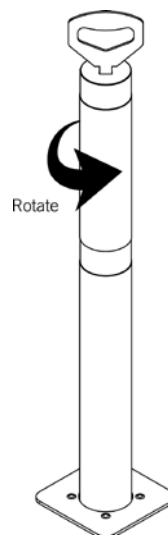

5. Rotate to lock.

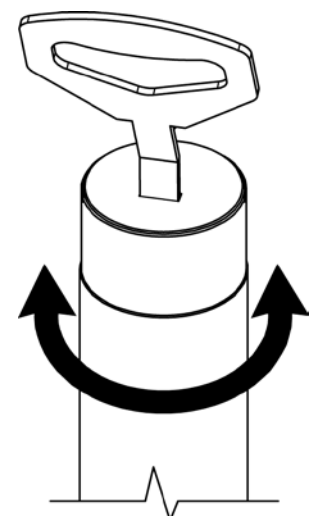

6. Confirm bollard is locked.

WARNING

NEVER ALLOW
THE BOLLARD
TO FREE FALL
INTO THE GROUND.
DAMAGE MAY RESULT.