



## BIKE RAILS / HAND RAILS

### Features:

- Suitable for a wide range of uses.
- Heavy 3mm thick wall tube.
- Hot dip galvanised finish or powder coated.
- Powder coating or reflective options available.
- Surface mount and below ground models.
- Two styles to choose from.
- Surface mount supplied with fixings.
- No assembly – ready for installation.

**Material:** 48mm diameter steel pipe with 3mm wall.

**Finish:** Galvanised and powder coated Yellow or galvanised only.

**Height:** 800mm above ground.  
300mm below ground.

**Width:** BR1 models 850mm.  
BR2 models 400mm.

**Weight:** BR1 models 9.2kgs (approx.)  
BR2 models 8.5kgs (approx.)

**Installation:** 6mm thick surface flange 150mm in diameter with 8 of 10 x 50mm masonry anchors for surface mount model. Below ground model has welded concrete starter bars.

**Fixings:** Supplied with surface mount models.

PART No.	DESCRIPTION
BR1G-SM	Bike rail 850 x 800mm surface mount – Galvanised
BR1P-SM	Bike rail 850 x 800mm surface mount – Powder coated
BR1G-BG	Bike rail 850 x 800mm below ground – Galvanised
BR1P-BG	Bike rail 850 x 800mm below ground – Powder coated
BR2G-SM	Bike rail 400 x 800mm surface mount – Galvanised
BR2P-SM	Bike rail 400 x 800mm surface mount – Powder coated
BR2G-BG	Bike rail 400 x 800mm below ground – Galvanised
BR2P-BG	Bike rail 400 x 800mm below ground – Powder coated



## HOLDING RAILS

### Features:

- Rails used by cyclists and pedestrians at walkways and crossings, available in two standard widths.
- Hot dip galvanised prior to Yellow powder coat and Class 2 Red and White reflective bands.
- Sleeve mounted installation for easy replacement of damaged rails.
- Surface mount, new concrete and core-drilled sleeves available.

**Material:** Rail – 50 N.B. pipe (60.3mm).  
Sleeves – 65 N.B. tube (76.1mm).


**Finish:** Galvanised and powder coated with reflective bands.

**Height:** 1000mm above ground.  
300mm below ground.

**Width:** 800 or 1200mm.

**Weight:** 8 or 12kgs (rail only).

**Installation:** Retained in sleeve with gibb key.

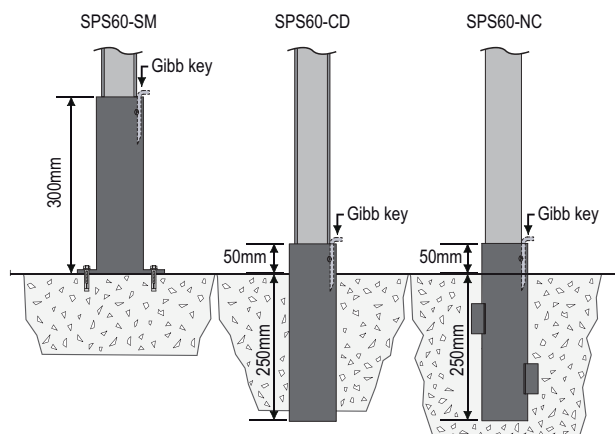

PART No.	DESCRIPTION
HR800-BG	Holding rail 800 x 1000 x 60mm
HR1200-BG	Holding rail 1200 x 1000 x 60mm
SPS60-SM	Sign post sleeve with gibb key – Surface mount
SPS60-CD	Sign post sleeve with gibb key – Core drilled
SPS60-NC	Sign post sleeve with gibb key – New concrete
SPGK	Additional post sleeve gibb key